


PRODUCT DATA SHEET SB265

Description: SB265 is a double coated polyester (PET) film tape coated on the exposed side with an aggressive permanent acrylic pressure sensitive adhesive (PSA) and on the liner side with an acrylic removable PSA. This tape is specifically designed for clean removal leaving no residue. Typical applications include, plastic extrusions, POP data strips, wire raceways, signage and displays.

Construction

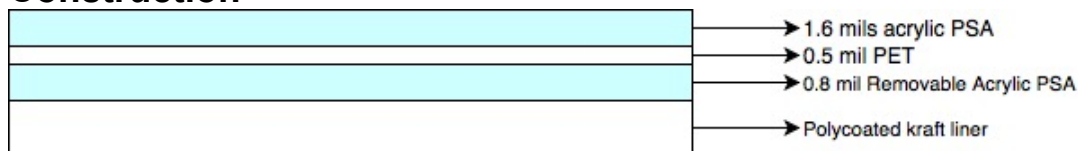

Feature and Benefits

- Very high immediate bond strength
- Water clear
- Excellent aging characteristics including resistance to UV exposure
- Removable adhesive cleanly removes without residue.

Typical Properties (not to be used for specification purposes)

TEST	METHOD	VALUE (US)	VALUE (METRIC)
180° Peel Adhesion	PSTC-101	Exposed -50 oz/in Liner – 10 oz/in	Exposed – 0.545 N/mm Liner – 0.109 N/mm
Shear Adhesion	PSTC-107	Exposed >20,000 min @ 2.2 psi Liner >20,000 min @2.2 psi	>20,000 min @ 15.2 kPa >20,000 min @ 15.2 kPa
Tack	ASTM D2979	12 oz	350 grams
Min Application Temp		10°F	-12°C
Max Continuous Use		300°F	150°C

For maximum adhesion, bonding surfaces should be clean, dry, and free from grease and oils. The firmer the application pressure and the greater the contact area, the stronger the bond.

IMPORTANT NOTICE TO PURCHASER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss, or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for his or her intended use, and the user assumes all risk and liability whatsoever in connection therewith. No representative of ours has authority to waive or change the foregoing provisions, but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to the needs and circumstances prevailing in their business.